

C系列电脑绗绣一体机


C Series Computerized Quilting and Embroidery Machine

用途 USE:

绗缝加工品：服装、睡袋、夏凉被、床罩、各种座垫等。

Products: garments, sleeping bags, quilts, bedspreads and all kinds of cushions etc.

示意图/working scheme

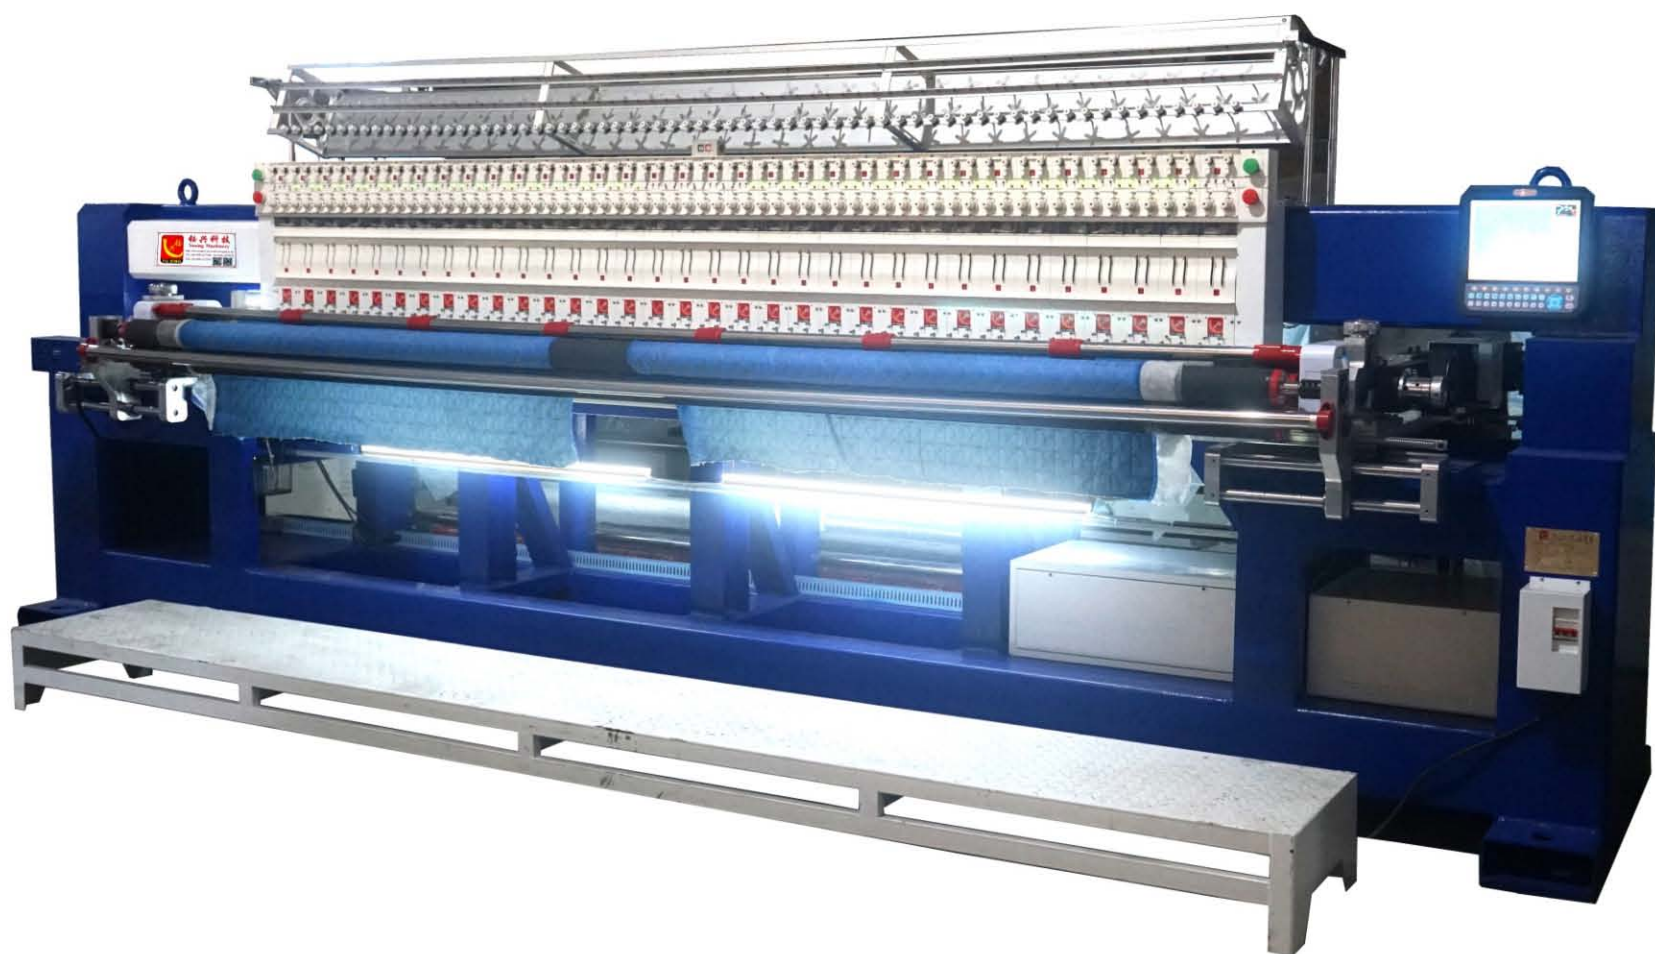

功能 FUNCTION:

- 绗缝绣花一体完成。
- Y向采用罗拉传动。
- 进出料采用张力电机保持布料平整。
- X'Y'Z方向采用伺服控制以保证绣作精度。
- 断线自动停机装置。
- 自动回退补绣功能。
- 自动润滑系统。
- 可任意选择机头绗缝。
- 连线绗缝独立花样，跳跃绗缝功能。
- 可读取田岛、百达灵、ZSK、SWF绣花格式。
- 独特的机械结构可减低本身带来的振动，从而更好的控制其振动及降低噪音。

- Quilting and embroidery is completed together
- Y axis is drove by roller system
- Keep fabric smooth by tension motor when fabric feed-in and feed-out
- Auto-stop device
- Auto-return for patch-up embroidery function
- Automatic lubrication system
- Easy head selection for quilting function
- Continuously quilting independent patterns function, jumping quilting function
- Tajima, Barudan, ZSK and SWF formats can be read
- The unique mechanical structure can reduce the vibration, thereby it will be better to control the vibration and reduce the noise

定制说明：可定制四倍旋梭

主要技术参数/Main Technical Parameters

机型 Machine type	型号 Model	头数 Head quantity	针距 Needle space	X行程 X-axis movement	刺绣面积(横) Minimum processsing area	主轴速度 Rolling speed	主机尺寸 (长*宽*高) Size:L*W*H	绗缝厚度 Quilting thickness	全机重量 Weight	电压 (AC) Rated voltage(AC)	功率 Power
单针控制 Single needle control	YXH-68-50.8C	17	50.8	254	1700	300-1200r/min	3400*1400*2000	20-300g	2600kg	380V/50Hz 220V/60Hz	4KW
	YXH-88-50.8C	22	50.8	254	2200	300-1200r/min	4200*1400*2000	20-300g	3000kg	380V/50Hz 220V/60Hz	4KW
	YXH-96-50.8C	24	50.8	254	2450	300-1200r/min	4500*1400*2000	20-300g	3400kg	380V/50Hz 220V/60Hz	5KW
	YXH-112-50.8C	28	50.8	254	2850	300-1200r/min	4900*1400*2000	20-300g	3800kg	380V/50Hz 220V/60Hz	6KW
	YXH-128-50.8C	33	50.8	254	3400	300-1200r/min	5400*1400*2000	20-300g	4200kg	380V/50Hz 220V/60Hz	6KW
	YXH-68-67.5C	13	67.5	254	1700	300-1200r/min	3400*1400*2000	20-300g	2600kg	380V/50Hz 220V/60Hz	4KW
	YXH-88-67.5C	16	67.5	254	2200	300-1200r/min	4200*1400*2000	20-300g	3000kg	380V/50Hz 220V/60Hz	4KW
	YXH-96-67.5C	18	67.5	254	2450	300-1200r/min	4500*1400*2000	20-300g	3400kg	380V/50Hz 220V/60Hz	5KW
	YXH-112-67.5C	21	67.5	254	2850	300-1200r/min	4900*1400*2000	20-300g	3800kg	380V/50Hz 220V/60Hz	6KW
分段式 subsection type	YXH-64-H-50.8C	32	50.8	254	1600+1600	300-1200r/min	5800*1400*2000	20-300g	4500kg	380V/50Hz 220V/60Hz	7KW

※ 免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
 ※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification.
 The pictures in catalogue are consult only. If there is any change, please according to the real object.

※ 免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
 ※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification.
 The pictures in catalogue are consult only. If there is any change, please according to the real object.

B系列电脑绗绣一体机

B Series Computerized Quilting and Embroidery Machine

用途 USE:

绗缝加工品：服装、睡袋、夏凉被、床罩、各种座垫等。
 Products: garments, sleeping bags, quilts, bedspreads and all kinds of cushions etc.

示意图/working scheme



功能 FUNCTION:

- 绗缝绣花一体完成。
- Y向采用罗拉传动。
- 进出料采用张力电机保持布料平整。
- X'Y'Z方向采用伺服控制以保证绣作精度。
- 断线自动停机装置。
- 自动回退补绣功能。
- 自动润滑系统。
- 可任意选择机头绗缝。
- 连线绗缝独立花样，跳跃绗缝功能。
- 可读取田岛、百达灵、ZSK、SWF绣花格式。
- 独特的机械结构可减低本身带来的振动，从而更好的控制其振动及降低噪音。

- Quilting and embroidery is completed together
- Y axis is drove by roller system
- Keep fabric smooth by tension motor when fabric feed-in and feed-out
- Auto-stop device
- Auto-return for patch-up embroidery function
- Automatic lubrication system
- Easy head selection for quilting function
- Continuously quilting independent patterns function, jumping quilting function
- Tajima, Barudan, ZSK and SWF formats can be read
- The unique mechanical structure can reduce the vibration, thereby it will be better to control the vibration and reduce the noise



定制说明：可定制四倍旋梭

主要技术参数/Main Technical Parameters

机型 Machine type	型号 Model	头数 Head quantity	针距 Needle space	X行程 X-axis movement	刺绣面积(横) Minimum proces sing area	主轴速度 Rolling speed	主机尺寸 (长*宽*高) Size:L*W*H	绗缝厚度 Quilting thickness	全机重量 Weight	电压 (AC) Rated voltage(AC)	功率 Power
单针控制 Single needle control	YXH-68-50.8B	17	50.8	254	1700	300-1000r/min	3400*1400*2000	20-300g	2400kg	380V/50Hz 220V/60Hz	4KW
	YXH-88-50.8B	22	50.8	254	2200	300-1000r/min	4200*1400*2000	20-300g	2800kg	380V/50Hz 220V/60Hz	4KW
	YXH-96-50.8B	24	50.8	254	2450	300-1000r/min	4500*1400*2000	20-300g	3200kg	380V/50Hz 220V/60Hz	5KW
	YXH-112-50.8B	28	50.8	254	2850	300-1000r/min	4900*1400*2000	20-300g	3600kg	380V/50Hz 220V/60Hz	6KW
	YXH-128-50.8B	33	50.8	254	3400	300-1000r/min	5400*1400*2000	20-300g	4000kg	380V/50Hz 220V/60Hz	6KW
	YXH-68-67.5B	13	67.5	254	1700	300-1000r/min	3400*1400*2000	20-300g	2400kg	380V/50Hz 220V/60Hz	4KW
	YXH-88-67.5B	16	67.5	254	2200	300-1000r/min	4200*1400*2000	20-300g	2800kg	380V/50Hz 220V/60Hz	4KW
	YXH-96-67.5B	18	67.5	254	2450	300-1000r/min	4500*1400*2000	20-300g	3200kg	380V/50Hz 220V/60Hz	5KW
	YXH-112-67.5B	21	67.5	254	2850	300-1000r/min	4900*1400*2000	20-300g	3600kg	380V/50Hz 220V/60Hz	6KW
分段式 subsection type	YXH-64-H-50.8B	32	50.8	254	1600±1600	300-1000r/min	5800*1400*2000	20-300g	4300kg	380V/50Hz 220V/60Hz	7KW

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
 ※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification. The pictures in catalogue are consult only. If there is any change, please according to the real object.

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
 ※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification. The pictures in catalogue are consult only. If there is any change, please according to the real object.

A系列电脑绗绣一体机


A Series Computerized Quilting and Embroidery Machine

用途 USE:

绗缝加工品：服装、睡袋、夏凉被、床罩、各种座垫等。

Products: garments, sleeping bags, quilts, bedspreads and all kinds of cushions etc.

示意图/working scheme

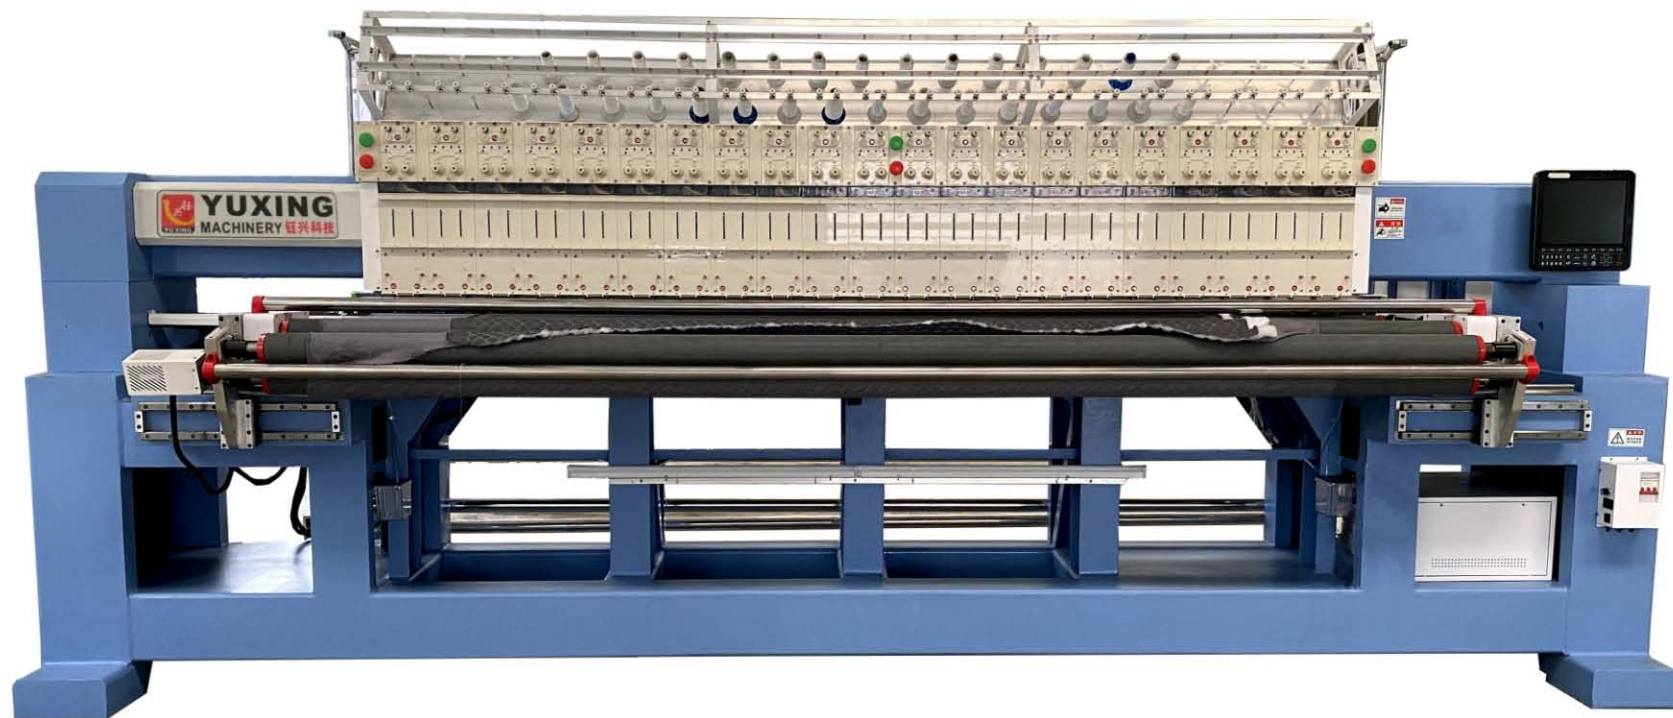

功能 FUNCTION:

- 绗缝绣花一体完成。
 - Y向采用罗拉传动。
 - 进出料采用张力电机保持布料平整。
 - X'Y'Z方向采用伺服控制以保证绣作精度。
 - 断线自动停机装置。
 - 自动回退补绣功能。
 - 自动润滑系统。
 - 可任意选择机头绗缝。
 - 连线绗缝独立花样，跳跃绗缝功能。
 - 可读取田岛、百达灵、ZSK、SWF绣花格式。
 - 独特的机械结构可减低本身带来的振动，从而更好的控制其振动及降低噪音。
- Quilting and embroidery is completed together
 - Y axis is drove by roller system
 - Keep fabric smooth by tension motor when fabric feed-in and feed-out
 - Auto-stop device
 - Auto-return for patch-up embroidery function
 - Automatic lubrication system
 - Easy head selection for quilting function
 - Continuously quilting independent patterns function, jumping quilting function
 - Tajima, Barudan, ZSK and SWF formats can be read
 - The unique mechanical structure can reduce the vibration, thereby it will be better to control the vibration and reduce the noise

定制说明：可定制四倍旋梭

主要技术参数/Main Technical Parameters

机型 Machine type	型号 Model	头数 Head quantity	针距 Needle space	X行程 X-axis movement	刺绣面积(横) Minimum processsing area	主轴速度 Rolling speed	主机尺寸 (长*宽*高) Size:L*W*H	绗缝厚度 Quilting thickness	全机重量 Weight	电压 (AC) Rated voltage(AC)	功率 Power
单针控制 Single needle control	YXH-68-50.8A	17	50.8	254	1700	300-1000r/min	3400*1400*2000	20-300g	2400kg	380V/50Hz 220V/60Hz	4KW
	YXH-88-50.8A	22	50.8	254	2200	300-1000r/min	4200*1400*2000	20-300g	2800kg	380V/50Hz 220V/60Hz	4KW
	YXH-96-50.8A	24	50.8	254	2450	300-1000r/min	4500*1400*2000	20-300g	3200kg	380V/50Hz 220V/60Hz	5KW
	YXH-112-50.8A	28	50.8	254	2850	300-1000r/min	4900*1400*2000	20-300g	3600kg	380V/50Hz 220V/60Hz	6KW
	YXH-128-50.8A	33	50.8	254	3400	300-1000r/min	5400*1400*2000	20-300g	4000kg	380V/50Hz 220V/60Hz	6KW
	YXH-68-67.5A	13	67.5	254	1700	300-1000r/min	3400*1400*2000	20-300g	2400kg	380V/50Hz 220V/60Hz	4KW
	YXH-88-67.5A	16	67.5	254	2200	300-1000r/min	4200*1400*2000	20-300g	2800kg	380V/50Hz 220V/60Hz	4KW
	YXH-96-67.5A	18	67.5	254	2450	300-1000r/min	4500*1400*2000	20-300g	3200kg	380V/50Hz 220V/60Hz	5KW
	YXH-112-67.5A	21	67.5	254	2850	300-1000r/min	4900*1400*2000	20-300g	3600kg	380V/50Hz 220V/60Hz	6KW
分段式 subsection type	YXH-64-H-50.8A	32	50.8	254	1600↔1600	300-1000r/min	5800*1400*2000	20-300g	4300kg	380V/50Hz 220V/60Hz	7KW

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。

※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification. The pictures in catalogue are consult only. If there is any change, please according to the real object.

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。

※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification. The pictures in catalogue are consult only. If there is any change, please according to the real object.